


Pos	Qty	Part No.	Description	Ordernumber
1	1	900074	Muffl. SSEC RR Large T1019 Carbon Steel	BM10S04-SECS - Carbon Steel
2	1	850034 750013	Mounting Parts: Adapter	
3	1	700048	Mounting Bracket	Weight:
4	2	14140	M6x16 Flange Screw	Stock: 2,7 kg
5	1	14055	Lock Nut M8	Bos: 2,2 kg
6	1	14060	Washer M8	Noiselevel: @ 5500 rpm
7	1	<i>Original</i>	<i>Washer Original</i>	Stock: Specified 94,0 dB(A)
8	1	14070	Bolt M8x35 DIN 912	Measured 92,0 dB(A)
9	1	14088	Pull Spring 36 mm.	Bos: Measured 92,5 dB(A)
10	1	64653	Clamp 53	
11 *	1	850035 700049	Heat Shield Kit (Optional): Heatshield	Performance

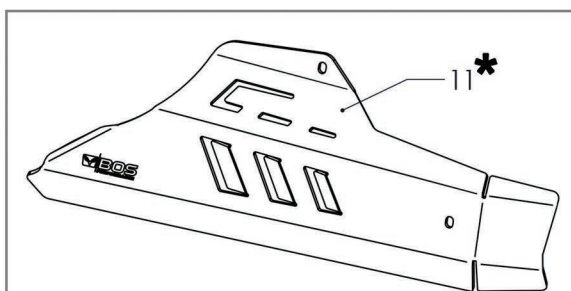

Option - Heatshield sold separately

Stock: 159,9 Hp / 11020 rpm
 Bos: 162,0 Hp / 10950 rpm
 Max. Hp incr.: + 3,8 Hp / 9040 rpm
 Max Nm incr.: + 1,4 Nm / 9000 rpm

Tips

In order to avoid smudges and fingerprints burning into the surface it is imperative to clean the exhaust before starting the engine, burnt in stains are very difficult to remove.

After 300 miles or 500 kms. check all nuts and bolts and retighten if necessary.